

RF Wireless Remote

RGB LED Controller



Feature:

- RF wireless Touch Remote makes it fun to play with. Effective control distance up to 20 meters.
- Multi-functional control,
- Input Polarity Protection and PWM(Pulse Width Modulation) Output Control Mode.
- 433MHz RF
- CE, RoHS Compliance.

Applications:

- Decorating Lighting in Party, Club, Bar, Stages, Room.
- Illuminating Hotels, Parks, Plazas, Commercial Buildings Façade, Museums, and Landscape.

Remote Panel:

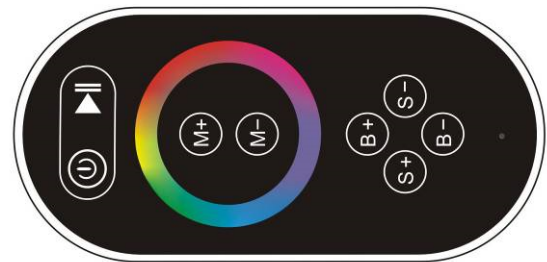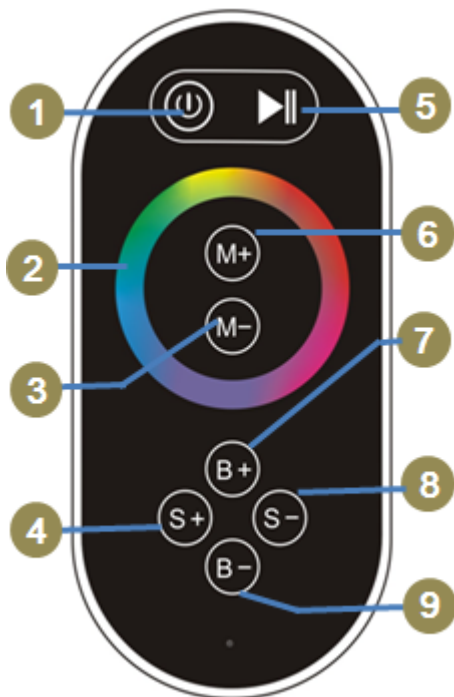


PN: AP-GR666-8

Specifications:


- Operating Voltage: DC12V~24V.
- Operating Current: Max 18A.
- Output Power: Max 216W / 432W (12V/24V)
- Common Anode
- Remote Operating Voltage: AAA battery*3pcs.
- Remote Standby Power: 0.08mW.
- Remote Power Consumption: 6mW
- Operating Temp: -20°C~60°C

- 1 Turn ON/OFF
- 2 Color Adjusting Touch Ring
- 3 6 Color Temperature adjusting
- 4 8 Dynamic Speed adjusting
- 7 9 Dynamic Brightness adjusting

Dimension

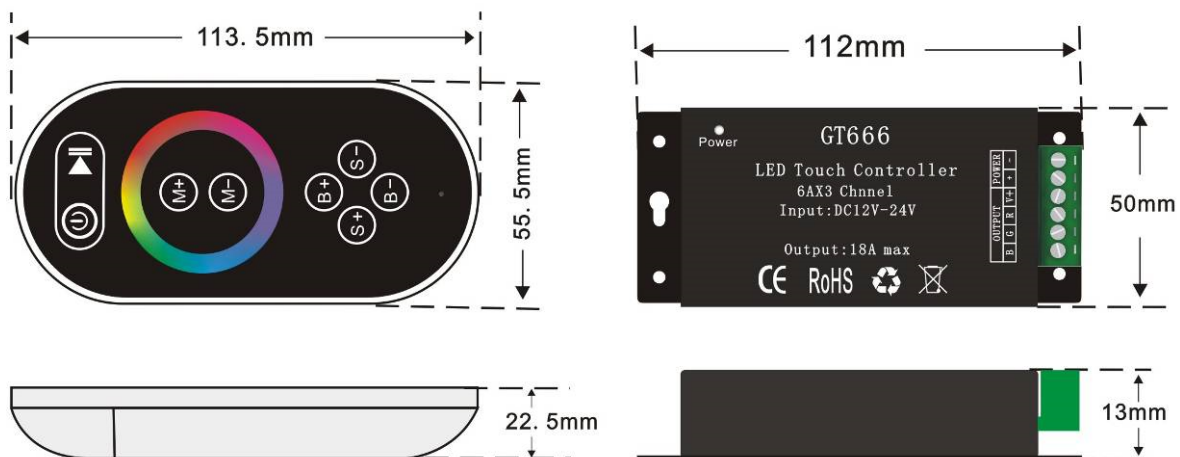

Packing

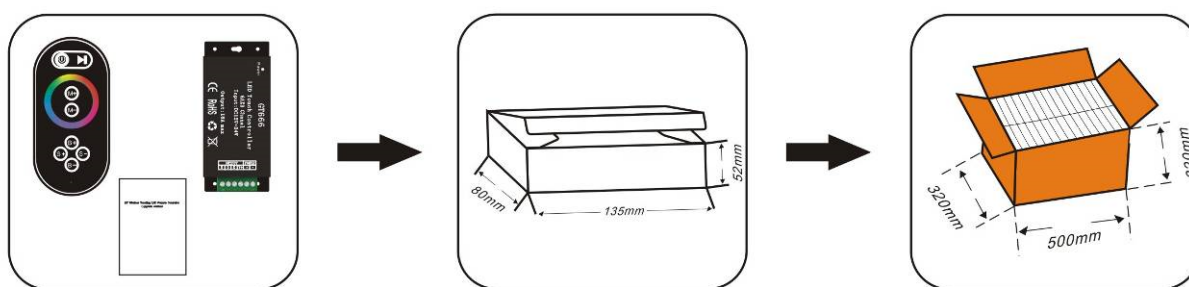

Controller	Remote	Carton Dimension	Weight	Package Dimension	weight/
L112*W50*H13mm	L113.5*W55.5*H22.5 mm	L135*W80*H52mm	215g	L500×W320×H320mm	11kg


Product Parts



Remote



Controller



User Manual

Caution

1. Please install the products by Authorized Electrician.
2. It is NOT a waterproof product, please keep it away water.
3. Well heat dissipation will extend the product life time. Proper ventilation for the LED Driver is recommend.
4. Please do NOT operate the product while lightening. do NOT install it in intense magnetic field or near the High Voltage Source.
5. Before using, Please make sure the Controller output Voltage meet the LED Requirement.
6. For safety, be sure that the operating current does NOT overload the wire capability.
7. Before power on, make sure the ports are connected properly, Wrong connection will damage the products.

Service

We full stand behind our products, provides the technical support and repair for them through their lifetime. Please feel free to contract us if you have any question.

15 Days Warranty

Refund will be made if our products have any problems in 15 days from the date you received the package. Refund will be given if item is returned in its original condition.. On receiving the item, we will refund immediately. For non-defect Item buyer require to pay for the two way shipping freight.

30 Days Warranty

If the item is defective within 30 days, we will supply you a replacement free of charge or a full refund. Buyers require to send back the item and are responsible for return shipping cost with proper packaging. On receiving the item, we will refund or send out a new one(we will pay for the resend postage) immediately.

1 year Warranty

We will replace items which are malfunctioning items for 1 year from the date you receive them . Buyer required to return the original item at his own cost. Buyer need to pay the two way shipping freight

Out-of-warranty Service

ETOUCH-LED will continue to service its products, even after the standard warranty expires. In the event that a product fails outside of the warranty period, the materials cost will be required for repair Circle

Contact Us

ETOUCH-LED Technology Company Limited

2nd floor, 88 Xin'an Third Road, 28th Block,

Bao'an District, Shenzhen, Guangdong, 518000, China.

Tel: +86 186 5007 4055

Skype: andrey.yang

Email: andrey.yang@hotmail.com; yangandrey@gmail.com

MSN: andrey.yang@hotmail.com

Typical Application:

