

# 2.4GHz RGB LED Controller

## Feature:

- 1, 2.4GHz RF Remote Control. Remote distance >20m
- 2, OEM / Customized is available.

## Application:


Widely and easily used to control LED light.

## Specifications:


- Voltage: DC12V~24V
- Current: Max 6A /Channel
- Power: 288w / 576w
- Operating Temp.: -20C~60C
- Remote Standby: 0.5mw.



## Remote Interface:

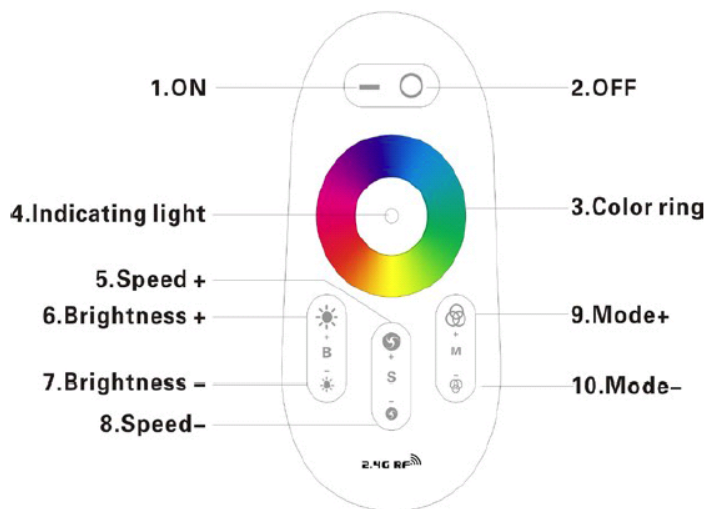

## Controller Interface:

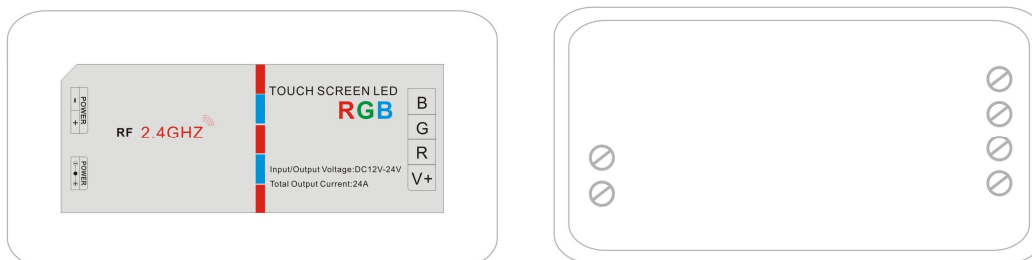

**Program List:**

No.#	Mode	Brightness	Speed	Remark
1	Static white color	Adjustable	Un-adjustable	White only
2	White shade gradual changing	Adjustable	Un-adjustable	White (off)
3	All colors gradual change	Adjustable	Adjustable	White (off)
4	RGB gradual change	Adjustable	Adjustable	
5	RGB jumpy change	Adjustable	Adjustable	
6	Seven colors jump change	Adjustable	Adjustable	
7	RG jumpy change	Adjustable	Adjustable	
8	RB jumpy change	Adjustable	Adjustable	
9	BG jumpy change	Adjustable	Adjustable	
10	White strobe flash	Adjustable	Adjustable	

**Code matching (Match the Remote to the Controller):**




**Defaults Code:** one Remote can control multi controllers

If you want to **match a Remote to one certain Controller**, you need to match the code of this Remote to the Controller.

**Here Below shows you how to match the code:**

- 1, Power on the Controller, and **within 5 seconds**, synchronously press the 2 keys on the Remote. As left image shown.
- 2, When the code matched successfully, the stripe (lighting) would triply flicker.

**Mechanical Dimension:**

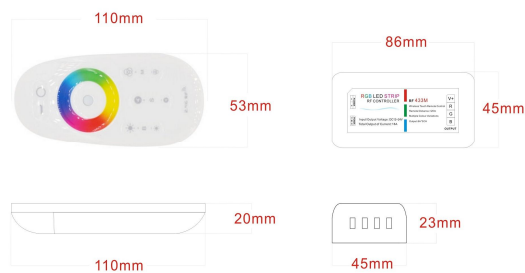


## Packing:



**Color Box Packing**  
L130\*W130\*H28  
150G



**Blister Packing**  
L130\*W200\*H28  
150G



100pcs  
15KG

## Connecting Setup:

